

(19) World Intellectual Property Organization International Bureau



(43) International Publication Date  
23 June 2005 (23.06.2005)

PCT

(10) International Publication Number  
**WO 2005/056400 A1**

(51) International Patent Classification<sup>7</sup>: **B65D 17/34**,  
51/18

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(21) International Application Number:  
PCT/AU2004/001753

(22) International Filing Date:  
13 December 2004 (13.12.2004)

(25) Filing Language: English

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(26) Publication Language: English


(30) Priority Data:  
2003906880 12 December 2003 (12.12.2003) AU

**Published:**

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: RECLOSABLE CAP FOR A BEVERAGE CONTAINER

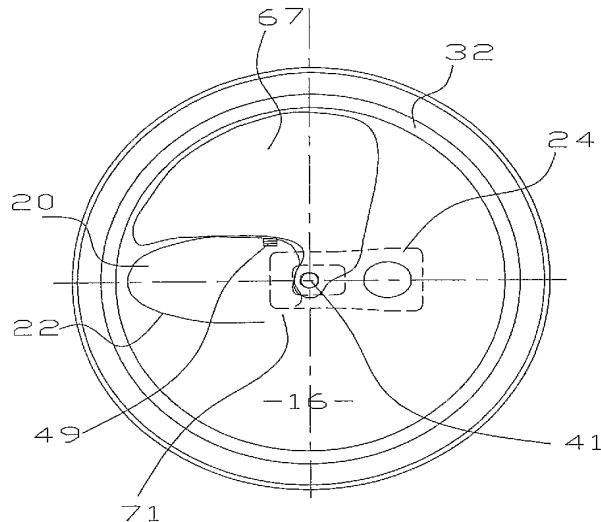

WO 2005/056400 A1

(57) Abstract: Beverage container or drink can (10) having a hollow body (12) with an open end and a cap (16). The cap comprises a panel member having a main portion and a partially or fully severable portion (20) to create a dispensing aperture (38). The cap has a closure member (67) within or inside the container and is movable relative to the panel member. The closure member has an engagement projection (114) to engage portion (20) following severing and further folding of the severed portion (20) causes the closure member to turn to position a handle (49) to extend through the aperture. The handle (49) is configured for a user to selectively move the closure member (67) to close a beverage flow passage through the dispensing aperture or to open the passage for dispensing. A sealing member is also applied to the closure member surrounding the aperture (38) to provide a seal.